




## Product Information

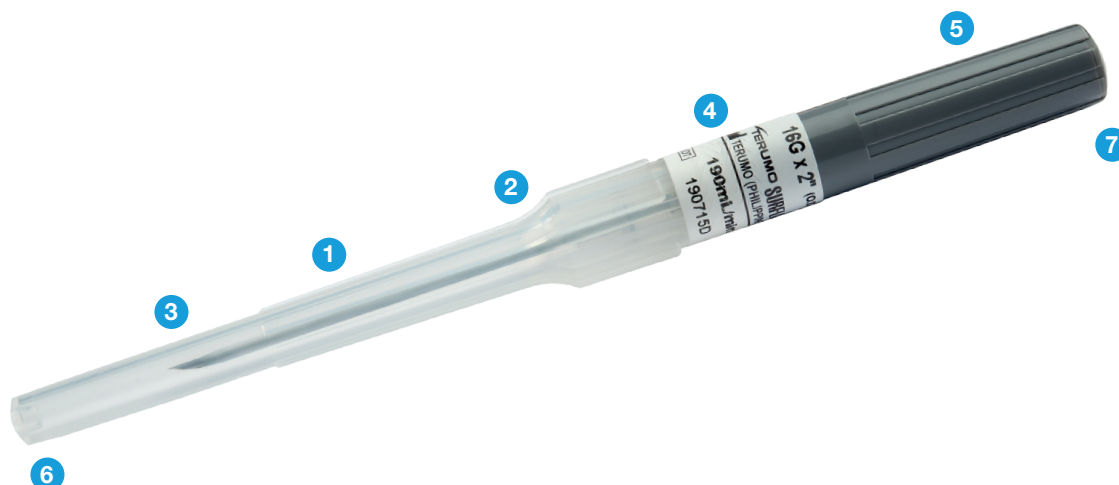

### Hard case primary packaging

The Surflo I.V. Catheters are made out of medical grade ETFE.

The materials of the Surflo™ I.V. Catheters are carefully selected to ensure a stable form during punctures under difficult conditions.

Description	Raw Materials
1 Catheter	ETFE with BaSO <sub>4</sub>
2 Catheter hub Caulking pin	Polypropylene + master batch Stainless steel
3 Cannula (internal needle)	Stainless steel
4 Needle hub	Polycarbonate
5 Filter	Polyester - vinyl synthetic resin
6 Protector	Polypropylene
7 Cap	Polypropylene + master batch

Does not contain components made of DEHP or natural rubber latex.



### Sterilization

With radiation (e-beam) to a Sterility Assurance Level of at least 10<sup>-6</sup>



### Storage

- Shelf life of 5 years
- The batch number and expiry date are printed on the label of each unit pack
- Do not store at extreme temperature and humidity



### Precautions

- Do not use if unit package is damaged
- Do not re-use
- Do not attempt to re-insert a partially or completely withdrawn needle
- Dispose of safely after single use to avoid risk of infection

# Your catheters of choice, for a wide range of I.V. applications.

## Product Range

Product Code	Colour	External Catheter Ø	Internal Catheter Ø	Catheter Length	Flow Rate ml/min.
SR+OX2419C1	Yellow	24G 0.67 mm	0.47 mm	19 mm	15
SR+OX2225C1	Blue	22G 0.85 mm	0.60 mm	25 mm	35
SR+OX2051C1	Pink	20G 1.10 mm	0.80 mm	51 mm	55
SR+OX2032C1	Pink	20G 1.10 mm	0.80 mm	32 mm	60
SR+OX1864C1	Green	18G 1.30 mm	0.95 mm	64 mm	85
SR+OX1851C1	Green	18G 1.30 mm	0.95 mm	51 mm	90
SR+OX1832C1	Green	18G 1.30 mm	0.95 mm	32 mm	100
SR+OX1664C1	Grey	16G 1.70 mm	1.30 mm	64 mm	180
SR+OX1651C1	Grey	16G 1.70 mm	1.30 mm	51 mm	190
SR+OX1464C1	Orange	14G 2.15 mm	1.73 mm	64 mm	300



## Packaging

Unit Box*	Shipping Carton		
	Quantity	Gross Weight	Dimensions (L x W x H)
50	1000	5.5 kg	325 x 254 x 251 mm
50	1000	5.6 kg	323 x 254 x 255 mm
50	1000	7 kg	326 x 256 x 315 mm
50	1000	5.7 kg	323 x 256 x 254 mm
50	200	1.5 kg	258 x 133 x 161 mm
50	200	1.5 kg	258 x 133 x 161 mm
50	200	1.2 kg	255 x 132 x 123 mm
50	200	1.6 kg	262 x 135 x 168 mm
50	200	1.6 kg	260 x 134 x 170 mm
50	200	1.6 kg	261 x 134 x 167 mm

Single unit: hard case \* Included languages are: en, fr, de, es, pt, it, nl, sv, da, no, fi, el, ru, pl, hu, cs, sk, tr, et, la, li, sl, sr, ro, bg, hr.

## Regulatory Status

CE Certification – Class IIa medical device

**Notified Body** TÜV Rheinland 0197

**Manufacturer** TERUMO (PHILIPPINES) CORPORATION  
124 East Main Avenue, Laguna Technopark,  
Binan, Laguna, Philippines

**EC Representative** TERUMO EUROPE N.V.  
Interleuvenlaan 40, 3001 Leuven, Belgium

This range complements the wider Terumo product offering including a comprehensive portfolio of both safety and conventional I.V. products which can be found at our web page on [www.terumo-europe.com](http://www.terumo-europe.com)



**Terumo Corporation**  
+81 3 6742 8500

**Terumo Europe N.V.**  
+32 16 38 12 11

Your Terumo partner